

**NOW AVAILABLE ON  
GENIE SCISSORS**

## Vertical access challenges? The SHU fits.

No more using ladders or standing on mid-rails, buckets and planks on the platform. SHU facilitates safe, OSHA compliant access to narrow spaces, for example ceiling grids and joists.

SHU safely increases working height and can be used with the rails up or lowered with our fall protection system.

***Step into our SHU.***



### FEATURES



SAFE	PRODUCTIVE	INNOVATIVE
<ul style="list-style-type: none"> <li>■ ANSI A92.6 Compliant</li> <li>■ CSA B354.2 Compliant</li> <li>■ OSHA Compliant</li> <li>■ Fall protection anchorage</li> <li>■ Safety cutout disables lift operation while on SHU platform when rails are lowered</li> </ul>	<ul style="list-style-type: none"> <li>■ SHU platform adds 20” of height</li> <li>■ Safe access to narrow areas</li> <li>■ Reduces the need for ladders</li> <li>■ Eliminates standing on railings, buckets or planks</li> <li>■ Provides access to small overhead spaces, for example ceiling grids and joists</li> <li>■ When needed, rails can be lowered for additional access</li> </ul>	<ul style="list-style-type: none"> <li>■ Customer and market driven design in response to real industry challenges</li> <li>■ Reduces risk of injury</li> <li>■ Easily replaces existing extension deck</li> <li>■ Retrofit to 2004 and newer, 30” and 46” wide Genie scissor lifts</li> </ul>

**NOW AVAILABLE ON GENIE SCISSORS**

**SHU SPECIFICATIONS: 30" WIDE**

<b>A - Added Height</b>	<b>20 in</b>	<b>0.51 m</b>
<b>B - Platform Width</b>	<b>21.5 in</b>	<b>0.55 m</b>
<b>C - Platform Length</b>	<b>24.8 in</b>	<b>0.63 m</b>
<b>D - Added Length</b>	<b>28.1 in</b>	<b>0.71 m</b>
<b>E - Outside Width</b>	<b>27.5 in</b>	<b>0.70 m</b>
<b>F - Guardrail Height</b>	<b>39.25 in</b>	<b>1.00 m</b>
<b>G - Mid-Rail Height</b>	<b>18.4 in</b>	<b>0.47 m</b>
<b>H - Mid-Rail Height (Scissor)</b>	<b>18.1 in</b>	<b>0.46 m</b>
<b>Weight</b>	<b>155 lb</b>	<b>70.31 kg</b>
<b>Scissor Capacity</b>	<b>440 lb</b>	<b>199.58 kg</b>
<b>SHU Capacity</b>	<b>250 lb</b>	<b>113.40 kg</b>

Specifications Subject to Change / Patent Pending

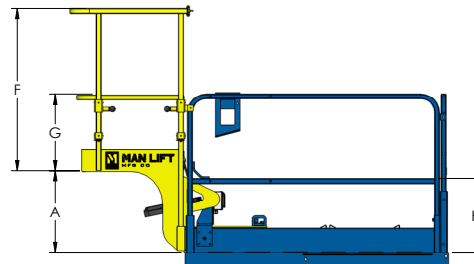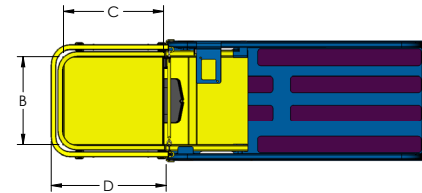

**STANDARDS COMPLIANCE**

- ANSI A92.6
- CSA B354.2
- OSHA Compliant

**EASY INSTALLATION**

- Remove existing extension deck and roller bracket assembly
- Lift and position the SHU onto the top of the scissor platform
- Insert platform roller wheels and brackets, reinstall roller bracket assembly
- Secure the SHU to the platform using the provided hardware
- Connect provided cutout switch to quick connect

